



Shaft Driven PhotoEye Accumulation Live Roller Conveyor (PE)

Bed Section:

8" Deep x 1 3/8" Flange x 12 Gauge galvanized frame.

Drive Shaft:


1" diameter cold rolled shaft with standard spools and 3/16" dia. 83 durometer elastomeric drive belts.

Galvanized Rollers:

1 7/8" Diameter, 16 Gauge, carrying roller with 7/16" hex axle.

Sensor:

24VDC photo-eye/solenoid module with polarized retro-reflective eye.

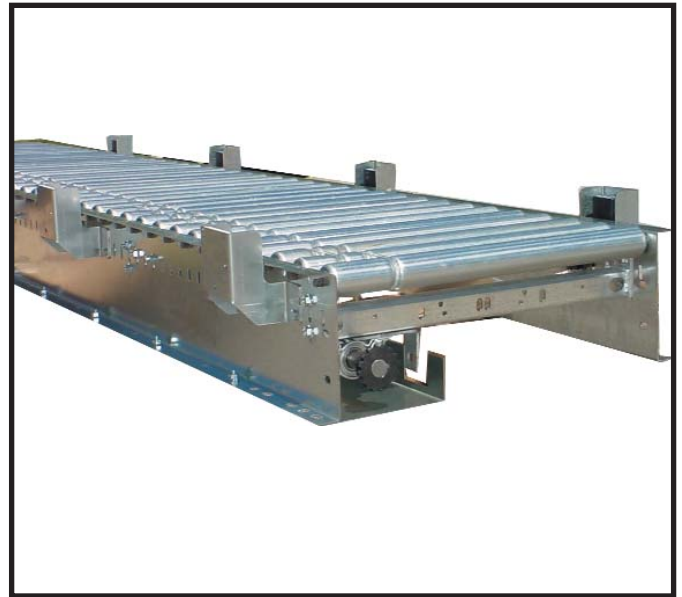

Automotion Shaft Driven Live Roller conveyor is available in various configurations to support numerous system applications. It is quiet, safe, and offers high speed and reversibility. It can power curves, straights, and other accessories such as transfers, junctions, and merges with a single drive. It is ideally suited when diverse live roller applications are required in a small area.

Photo-eye accumulation shaft driven conveyor utilizes Automotion's custom designed integral photo-eye/solenoid valve module to provide zero-pressure accumulation.

Automotion's shaft Driven Live Roller Conveyor reduces overall system cost while enhancing system capabilities and flexibility. Costs are reduced because transferring, merging, diverting, and accumulating beds can all be powered by a single drive. The driveshaft, common to each of the shaft driven beds, is easily coupled to the next downstream conveyor bed. This flexibility allows your system to grow and adapt as your needs change. The internalized drive shaft makes the conveyor beds forklift friendly when installing at higher elevations.

Shaft Driven Live Roller Conveyor is primarily for horizontal transportation and accumulation of product. It allows personnel as well as automated accessories to stop, pull, divert or redirect loads to or from a main trunk line, work station, secondary line or palletizing unit. Shaft Driven Live Roller Conveyor has a large number of accessories available.

Typical Applications:

Transportation
Zero-Pressure Accumulation
Staging

Live Load Capacity:

Up to 20 lbs. per roller.

Standard Nominal Widths:

18", 24", 30", & 36"

Between Rail Widths:



16", 22", 28" & 34"

Carrying Roller Centers:


2", 3", and 4"

Options:

Various Guard Rail Options
Various Floor & Ceiling Supports
Hi-Speed Rollers
Speed-Up Spools
Cog Belt Drive
24" & 30" Accumulation Zones
Urethane Coated Rollers
Automatic & Manual Air Brakes
Automatic & Manual Case Stops

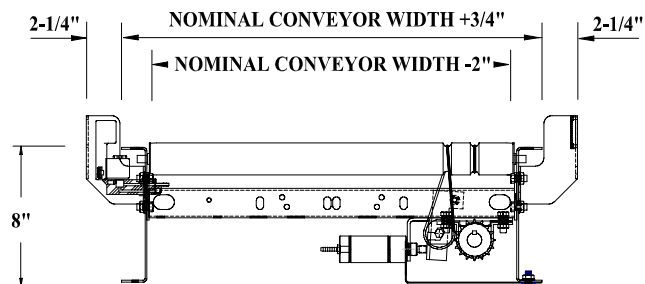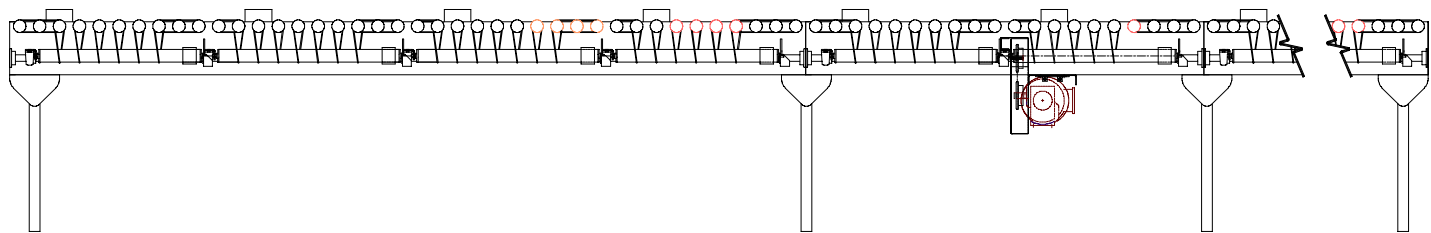

PRODUCT FLOW →

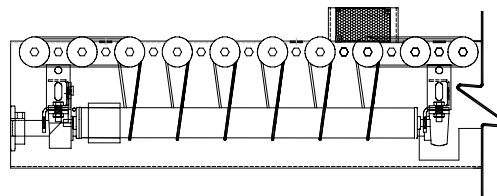

11000 South Lavergne Avenue Oak Lawn, Illinois 60453-5500
 Phone: 708-229-3700 Fax: 708-229-3799
www.automotionconveyors.com
info@automotionconveyors.com